



DESIGN AND PERFORMANCE IN ONE

Performance, design, installation and maintenance are just four of the aspects that were the focus during the development of KITE Ceiling.

The air diffuser was named after the bird Kite, which is the coat of arms of the municipality of Tomelilla, Sweden. What does Sweden have to do with it?

Simple, it was here the diffuser was developed and is produced!





With the help of the spring function on the front of KITE Ceiling, installation, commissioning, maintenance and cleaning are uncomplicated and fast. Which saves both time and money.

AIR FLOW - SOUND PRESSURE ROOM (Lp10A) *)								
KITE CR		25 dB (A)		30 dB (A)		35 dB (A)		
Size		l/s	m³/h	l/s	m³/h	l/s	m³/h	
125-600		53	191	63	227	73	263	
160-600		66	238	76	274	87	313	
200-600		88	317	102	367	119	428	
250-600		114	410	132	475	153	551	
315-600		125	450	147	529	174	626	
KITE CR	KITE CR ALS		25 dB (A)		30 dB (A)		35 dB (A)	
Size	Size	l/s	m³/h	l/s	m³/h	l/s	m³/h	
125-600	100-125	33	119	39	140	47	169	
160-600	125-160	47	169	56	202	67	241	
200-600	160-200	75	270	87	313	102	367	
250-600	200-250	101	364	118	425	137	493	
315-600	250-315	129	464	149	536	172	619	


The table shows supply air data for fully open damper.

For product data and more details see the product data sheet.

^{*)} Lp10A = Sound pressure incl. A-filter with 4 dB room attenuation and 10 m^2 room's absorption area.

KITE Ceiling delivers on many levels!

With its stylish design it blends into most environments and with its high performance, it delivers a silent and draught-free indoor climate. Accordingly, KITE Ceiling gives you both design and performance in the same package.

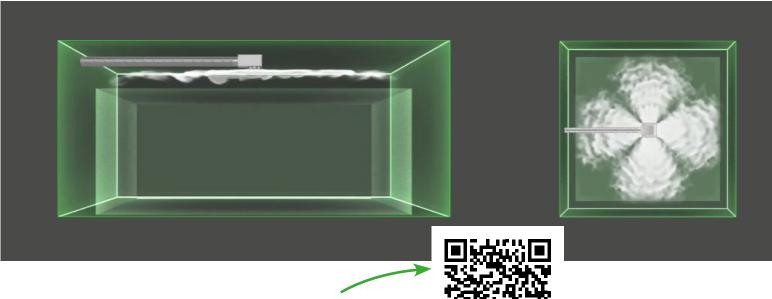

Watch KITE Ceiling's efficient 4-way air discharge in the animation.



Feel good **inside**



