

CASA R2 Smart
Perfect for renovation



Swegon CASA R2 Smart

Spice rack air handling unit (598 x 315 x 700 mm, Ø125 mm) with rotary heat exchanger suitable for kitchen installation in smaller homes (216 m³/h, 140 m²). The market's most intelligent demand-controlled humidity function as standard. Developed, manufactured and tested for Nordic climate.

Free energy with rotary heat exchanger

The heat exchanger makes use of the energy in the indoor air in the winter to heat the incoming outdoor air and in the summer to reduce the supply air temperature. On a cold winter day the heat exchanger gives "free" heating energy up to 36°C by converting the -20° cold outdoor air to +16°C warm supply air. The heat exchanger is manufactured with aluminium fins and provides a high degree of efficiency. A certain amount of moisture, removed with the extract air, is recovered to the supply air. This is especially beneficial in the winter when the outdoor air is usually dry, which results in problems for people and the interior.

Defrosting

The defrosting function guarantees continuous ventilation in the home even during cold conditions. If there is a risk of the unit's heat exchanger freezing, the speed of the fans increases and the warm extract air prevents freezing occurring inside the heat exchanger. With the help of a preheater (accessory), you can maintain balanced ventilation and avoid negative pressure in the residence even under extreme conditions.

Preheater

With the help of a preheater (accessory), you can maintain balanced ventilation and avoid negative pressure in the residence even under extreme conditions and enable balancing functions for fireplaces and cooker hoods.

Reheater

Usually the recovered thermal energy from the extract air is sufficient to heat the supply air. In cold conditions, an electric or waterborne reheater can be used to maintain a comfortable indoor climate. It can be placed internally in the air handling unit or externally in the duct (see technical data).

Automatic summer mode

Summer mode helps to maintain the home's indoor air comfort. The heat exchanger makes use of the cool indoor air during warm days and cools the incoming outdoor air. At night the home is cooled with fresh outdoor air. This is managed by an advanced automatic system that can be set according to the resident's requirements. Very economical comfort coolness can be produced intelligently almost free of charge.

Cooling

If there is access to cold water in the property (e.g. cooling pump), a cooling coil can be installed in the supply air/outdoor air duct to produce comfort cooling in the residence. The supply air temperature is controlled automatically from the ventilation unit's control system.

Separate connection for a cooker hood

The cooker hood can be connected via a separate duct to the unit. The cooker hood does not need a separate fan, duct, roof duct or roof hood. Permits balancing function for the cooker hood.

Installation

CASA R2 can be mounted on the wall in the kitchen, laundry room, service entrance or the like. When installed in a kitchen, the unit can be combined with different cooker hoods. The unit is designed to be installed in line with existing cabinet frames and hatches to give a consistent design. There is a cover panel in white, black or stainless steel as an option when installing without the existing hatch.

- 1 Ecodesign energy class A*
- 2 Air flow range 65 - 126 m³/h
- 3 Annual efficiency up to 80 % (Stockholm 21°C)
- 4 Demand-controlled humidity function as standard
- 5 Automatic summer function and passive cooling
- 6 Anti-frost protection ensures continuous ventilation
- 7 External coils for heating and cooling as an option
- 8 Can be connect to the automated building management system (I/O/Modbus)
- 9 Can be integrated with the cooker hood for placement above the cooker.

**Energy classification according to EcoDesign directive Lot 6. Energy class may vary depending on the selected accessories.*



Smart control technology

Controls (options)

CASA Smart ventilation units are equipped with the market's most versatile control options! Select the required control method or combine several!



Smart Access

Use your mobile device to control and monitor your indoor climate. Connect the Smart Access module to your ventilation unit and connect it to your home network.



Smart control panel

White wall mounted control panel with a colour display and touch buttons for both recessed and surface mounted installation.



Cooker hood

All Smart cooker hoods can be used to regulate the ventilation unit in three modes (home, away, boost). Automatically balances the ventilation when a cooker hood is used.



Building automation

Centralised monitoring and control with the help of Modbus connection modules or configurable I/O.

Basic functions

You can switch as required to an appropriate operating mode or let the pre-programmed weekly clock switch operating mode according to the diurnal rhythm you want.



Boosted air flow

A large air flow is used when the ventilation requirement increases, e.g. for cooking, taking a sauna, showering or drying laundry.



Home

Normal air flow. Guarantees that there is sufficient fresh indoor air in the home, and that the building construction is at its best.



Away

Low air flow. Reduces energy consumption when the ventilation requirement in the home is small.



Travelling

Very low air flow and lower supply air temperature. Used when no one is present in the home.

Compensation functions

Compensates ventilation flows in the home in order to facilitate for the inhabitants.



Fireplace function

An intelligent fireplace function that helps to produce the correct amount of replacement air, specifically for your fireplace. Facilitates lighting the fire and ensures clean combustion.



Cooker hood function

Balances the ventilation when a cooker hood is used. Helps to prevent excessive negative pressure and improves fume extraction capability of the cooker hood.



Central vacuum cleaner function

Balances the ventilation when a central vacuum cleaner is used. Helps to prevent excessive negative pressure and improves the cleaning result.

Automatic functions (options)

Intelligent ventilation is capable of identifying residents' needs. The Smart System measures the indoor air quality and knows exactly how much ventilation is required in different situations.



Intelligent humidity automation (RH) as standard

The market's most advanced moisture automation is now standard in all new Swegon CASA ventilation units. While traditional humidity sensors only switch the ventilation to boosted ventilation, the Smart Automation continuously analyses the indoor air and regulates the ventilation in accordance with the actual humidity variations.



Automatic Home/Away/Boost system (CO₂)

automatically lowers the ventilation to Away mode and saves energy when the home is empty. When the residents are at home, the ventilation is automatically increased to bring exactly the right amount of fresh air into the home.



Air Quality Automation (VOC)

increases the ventilation if too much pollution is detected in the indoor air, such as odours or vapours (evaporating organic compounds).

The Smart Control is easy to activate. The installation does not require cabling around the home, and can also be installed retrospectively in older Smart ventilation units.



Swegon



Ventilation



CO2



Humidity

41

44

22

Technical data



ENERG Y IJA
енергия · ενέργεια IE IA

Swegon CASA
R02VL07S00C

A+

A

B

C

D

E

F

G

A

39
dB

216 m³/h

ENERGIA · ΕΝΕΡΓΙΑ · ΕΝΕΡΓΕΙΑ · ENERGIA · ENERGY · ENERGIE · ENERGI
 2016 1254/2014

(SEC) in kWh

Mean climate **-37.7** **A**

The energy class may vary depending on how the unit is equipped.



	R2	R2 Nordic
Air flow range (according to Ecodesign)	65 - 216 m ³ /h	65 - 216 m ³ /h
Rated voltage	230 V, 50 Hz	230 V, 50 Hz
Fans	234 W	234 W
Internal electric preheater	—	—
Internal electric reheater	400 W	700 W
External electric pre/reheater (Duct mounted)	As an option	As an option
External water based heating coil/cooling coil (Duct mounted)	As an option	As an option
Max. total output	654 W	954 W
Fuse protection	10 A	10 A
Weight	45 kg	45 kg
Duct connections	Ø 125 mm	Ø 125 mm
Outlet for condensate	—	—

Dimensions, w x l x h	598 x 315 x 700 mm
Heat exchangers	Rotary heat exchanger. Drive motor 10 W.
Enclosure class	IP21
Control system	CASA Smart + automatic humidity function as standard
Control panel CASA Smart	Available as an option
Filters	Filter class ISO ePM1 50% (F7) for supply air and extract air.
Colour, exterior	White, RAL 9010 (corresponds to NCS 0502-Y07R)

Dimensions



Outdoor air





Supply air




Extract air





Exhaust air

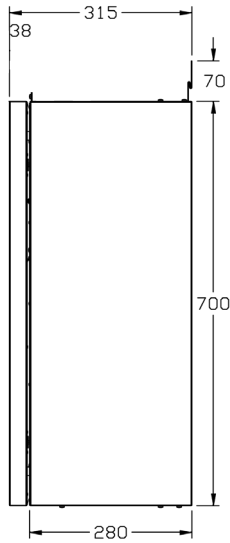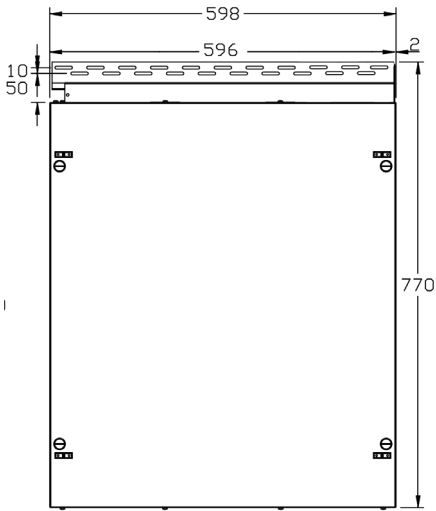


CASA R2 L, left-hand version




CASA R2 R, right-hand version

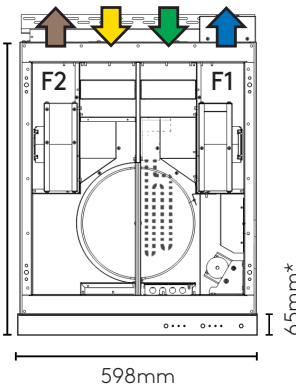


CASA R2 R, right-hand version
Cooker hood JAZZ

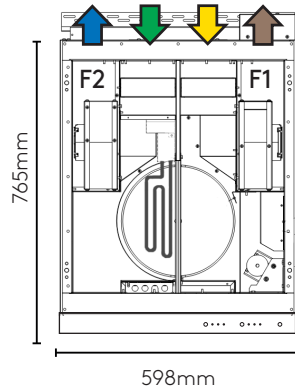

CASA R2 L, left-hand version
Cooker hood JAZZ

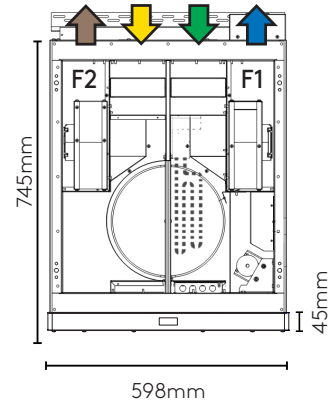

CASA R2 R, right-hand version
Cooker hood DANCE

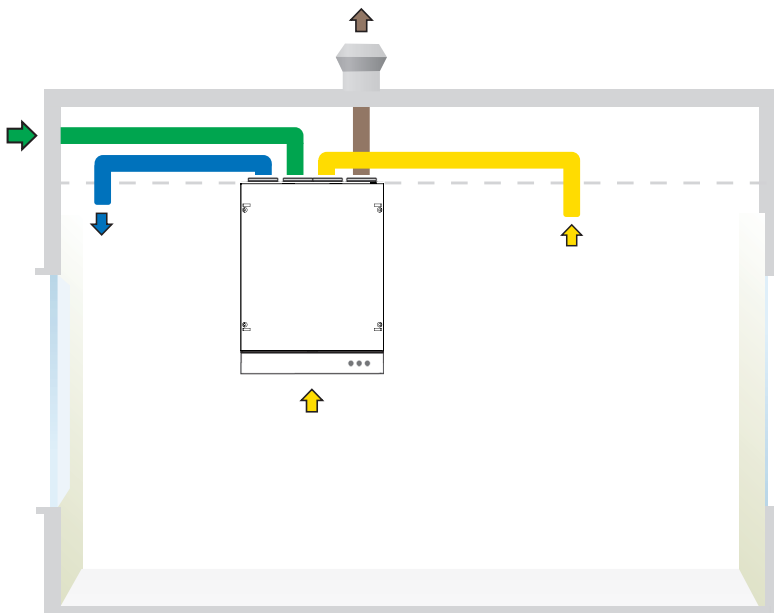


CASA R2 L, duct connections and cooker hood connected to the bottom of the ventilation unit.

Note! Always check the unit design (L/R) and correct duct sequence in the installation instructions.


Fan curves

More detailed data for sound to the surroundings and duct connections are available via procasa.swegon.com.


Sound power level emitted to the supply air duct

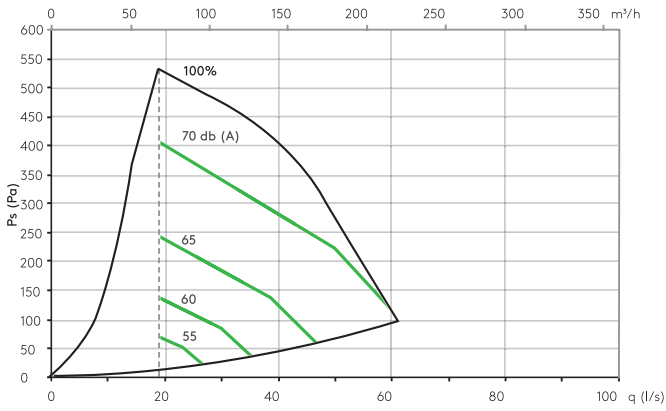


Sound power level emitted to the extract air duct

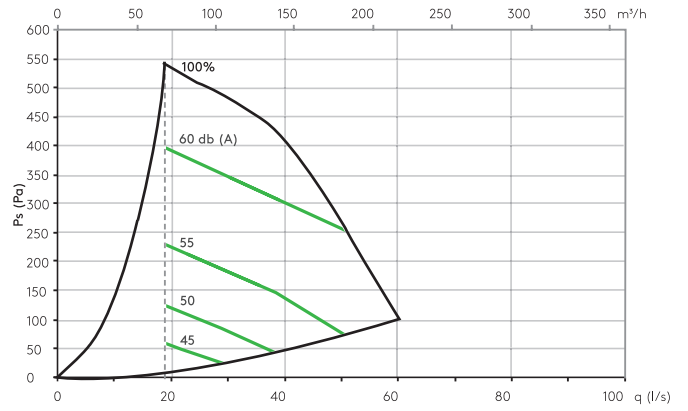

Sound power level emitted to the exhaust air duct

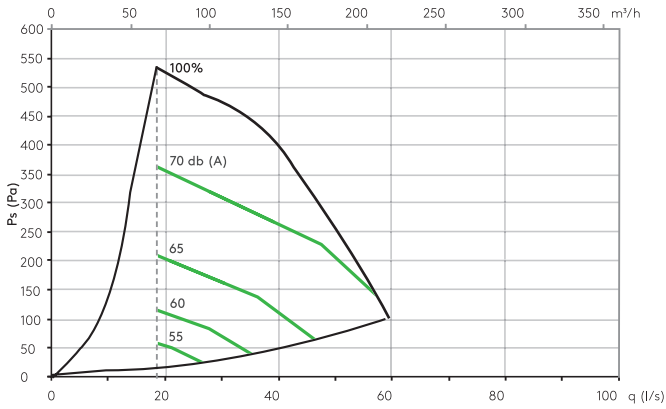


Sound power level to a duct for outdoor air

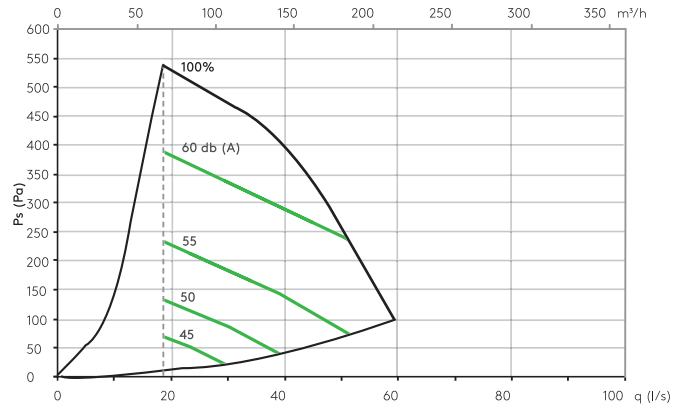

- Reference air flow
- Max. air flow
- Min air flow
- Sound power L_{wa} dB (A)

Air flow and sound power level to the surroundings

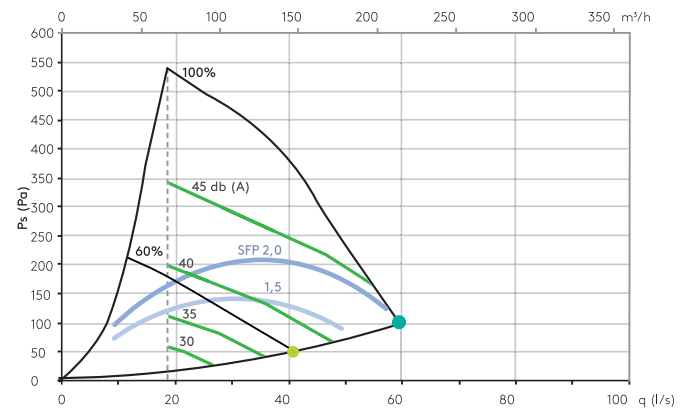

	Sound power level, L_w (dB), table K_{ok}							
	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
Sound emitted to supply air duct	15	6	1	-4	-5	-11	-20	-30
Sound emitted to extract air duct	21	13	0	-10	-16	-23	-32	-32
Sound emitted to exhaust air duct	16	9	0	-4	-5	-12	-21	-32
Sound to a duct for outdoor air	22	12	-2	-11	-12	-24	-31	-31
Sound emitted to the surroundings	19	11	4	-8	-17	-19	-23	-25

Correction table for sound pressure level		
room area	normally furnished room	heavily furnished room
5 m ²	- 2 dB(A)	+ 3 dB(A)
10 m ²	- 4 dB(A)	0 dB(A)
15 m ²	- 5 dB(A)	- 3 dB(A)

For more detailed sound data refer to the calculation software ProCasa.



- 1 Smart ventilation takes care of the indoor air quality automatically
- 2 It knows when you leave home and when you come back
- 3 It knows when you do laundry, shower or cook food
- 4 It adjusts ventilation accordingly based on your current need
- 5 It guarantees fresh and healthy indoor climate

Ventilation unit and accessories

CASA R2 Smart (MiniWin)



- 65-126 m³/h, 4 x Ø125 mm
- Supplied with approx. 1.5 m controlled cable. Order control panel and 10 m/20 m extension cable separately.
- Humidity automation as standard (RH)
- Wall mounting bracket
- Cover panel is not included and must be ordered separately

Part no	Energy class*	Description
R02VL04S00H	B	CASA R2 Smart L 400W RH
R02VR04S00H	B	CASA R2 Smart R 400W RH
R02VL07S00H	B	CASA R2 Smart L 700W RH
R02VR07S00H	B	CASA R2 Smart R 700W RH
R02VL07S00C	A	CASA R2 Smart L 700W RH+CO2
R02VR07S00C	A	CASA R2 Smart R 700W RH+CO2

L = supply air left. *Energy classification according to EcoDesign directive Lot 6 (Medium).

Filter



R02FS	Reservfilter ISO ePM1 50% (F7) 2st
-------	------------------------------------

Cover panel

To CASA R2 there is also a sound insulated cover panel in white, stainless or black available that replaces the kitchen cabinet door. The cover panel is sound insulated and has a flat front and rounded corners that gives a stylish look. Suitable in combination with old 260 mm kitchen cabinet bodies.



TB00015	Cover panel Sound insulated White
TB00018	Cover panel Sound insulated Stainless steel
TB00015S	Cover panel Sound insulated Black
TB00316	Magnetic connectors (4 pcs) for mounting existing cabin door in the front of the ventilation unit

Cooker hood

CASA R2 can be integrated with the cooker hood for placement above the cooker. The cooker hood is available in two models, Jazz and Dance JAZZ (white/stainless)



Motorised damper, touch panel, LED lighting, 6x spotlight. White or stainless steel with glass front

PJV6M (S)*	Jazz Smart, white 600 mm, duct connection in the middle (R2)
PJR6M (S)*	Jazz Smart, stainless steel 600 mm, duct connection in the middle (R2)

* Product code without letter S = cooker hood without stove guard Product code ending with letter S = cooker hood with stove guard

DANCE (stainless/black/white)

Motorised damper, touch panel, alu-filter, LED lighting, 6x spotlight, exclusive design, low installation height



TB00051	Cooker hood DANCE Stainless 60 cm
TB00051S	Cooker hood DANCE Black 60 cm
TB00051V	Cooker hood DANCE White 60 cm

Control accessories

White wall mounted control panel with a colour display and touch buttons for both recessed and surface mounted installation.



SC10	Control panel (1-2 per unit)
SC14	SC10 + modular cable 10 m
SC15	SC10 + modular cable 10 m + mounting frame
SC16	SC10 + mounting frame
102SAK	Mounting frame, for surface mounting of the control panel
PMK20	Modular cable, 20 m and RJ9 adapter for units
604010	Modular cable 10m



Use your mobile device to control and monitor your indoor climate. Connect the Smart Access module to your ventilation unit and connect it to your home network.



SMA	Smart Access module for connection to the internet
SMAW	Smart Access module + WLAN router
SMAG	Smart Access module + 3G/4G mobile router (not SIM)

Building automation

As standard the ventilation unit has two configurable I/O channels. If there is a need of additional connection points, the ventilation unit has space for a separate connection cable (SEC). Modbus connection module (SEM) gives you advanced connection options to a master system.

SEM	Modbus connection module
SEC	Connection cable (configurable I/O) for Smart ventilation units
WSTC	Room temperature sensor, total package with connection unit for ventilation units. The sensor is installed on the wall or in a recessed junction box (60 mm between holes).



Automatic functions



With the help of an internally mounted sensor, it is easy to fully automate your apartment's ventilation system. Can easily be retro-fitted by replacing the existing internal RH-sensor.

SRHCO2	Automatic Home/Away/Boost system + humidity automation (RH + CO ₂)
SRHVOC	Automatic air quality system + humidity automation (RH+VOC)

Waterborne air coolers



With an air cooler mounted in the supply air duct, comfort cooling is created in the residence by connecting a cooling medium circuit or a cooling water circuit to the cooler. The air cooler is controlled automatically from the ventilation unit's Smart control system and settings can be changed using a CASA Smart control panel. The delivery includes: Air cooler, SET connection module, actuator and 3-way valve, 24 V transformer, requisite sensors and instructions.

SDCW160	Cooling coil pack Ø160
---------	------------------------

Waterborne air heaters



In buildings equipped with a waterborne heating system, the supply air can be heated with a duct mounted waterborne air heater. The air heater is controlled automatically from the ventilation unit's Smart control system and settings can be changed using a CASA Smart control panel. The delivery includes: Air heater, SET connection module, actuator and 3-way valve, 24 V transformer, requisite sensors and instructions.

SDHW125	Heating coil package Ø125
SDHW160	Heating coil package Ø160

Brine air heater/cooler for ground source heat pump



In a property equipped with a ground source heat pump, a brine air heater/cooler for the heat pump can be installed in the outdoor air duct. In the winter it heats the air taken in and ensures that the ventilation unit operates with the greatest efficiency even in extreme cold. In the summer, the medium in the ground circuit is used to cool the building. The control technology in CASA Smart automatically ensures that the air heater/cooler is utilised optimally all year round. The delivery includes: heating/cooling coil, wall mounting bracket/ceiling mounting frame, an effective 4-row air cooler for cooling medium, SET connection module, coarse filter, requisite sensors and instructions and drip tray for condensate water: condensation water outlet with 3/8" male thread.

SDHW250F	Heating/cooling coil Ø250, G4
----------	-------------------------------

Electric air heater



Can be used for preheating and is placed in the outdoor air duct to guarantee continuous ventilation under very cold conditions and permit balancing functions (fireplace function/function for a cooker hood) in the air handling unit without an integrated air heater for preheating. If the air heater is to be installed as a preheater, a FLK-filter needs to be installed in the duct in front of the preheater. An electric air heater can also be placed in the supply air duct and used as a reheater to maintain a comfortable supply air temperature under very cold conditions. The electric duct heater has built-in regulation and is controlled directly from a ventilation unit. The heater is connected using a separate power supply 230 V. The delivery includes: air heater, SET connection module, requisite sensors and instructions

SDHE125-1T	Electric heater Ø125
SDHE160-1T	Electric heater Ø160
FLK12	Prefilter box Ø125 mm, G4
FLK16	Prefilter box Ø160 mm, G4

Other accessories




Used for connection of external accessories, for example, damper, duct coils, etc.

SET	Connection module for control of the duct mounted air heater/cooler / control of shut-off dampers
POWER24V20W	SET / power source for actuators



Formed condensation insulation that is easy to install. Mounted on pipes or parts before insulation. Spliced securely with tape. Gives good protection against condensation deposits on cold ventilation ducts routed in warm areas.

9000476	Straight section, Ø125 mm, L1000
9000480	Elbow 90, Ø125
9000483	Splicing tape



The design consists of three sides where the front panel is detachable for easy access and is intended to enclose the ventilation ducts on CASA R2. The extension piece can be used where the ducts run straight up through the ceiling or where they are angled to the side above the ventilation unit. Available in white or stainless steel.

R02EPW	Extension piece towards the ceiling, white
R02EPS	Extension piece towards the ceiling, stainless steel



Duct mounted shut-off dampers type 4 and damper actuator 24 V with spring return. The damper closes in the event of a power failure or alarm when a risk of freezing exists. The damper actuator is electrically connected to a CASA SET-module. SET module and 24 V adapter is ordered separately as required.

SDD125	CASA Damper Ø125 24V
SDD160	CASA Damper Ø160 24V

Feel good **inside**




Swegon 


Fan curves

More detailed data for sound to the surroundings and duct connections are available via procasa.swegon.com.


Sound power level emitted to the supply air duct

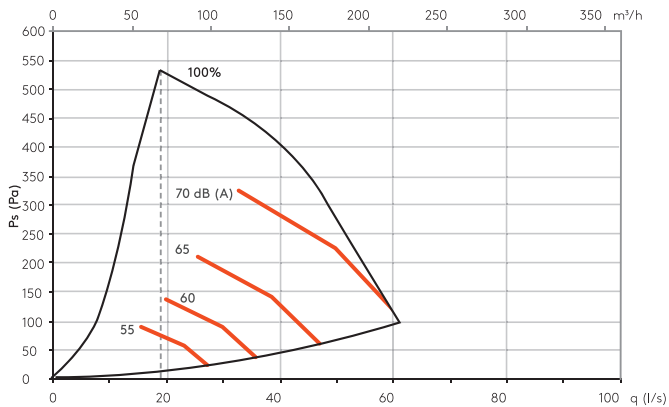


Sound power level emitted to the extract air duct

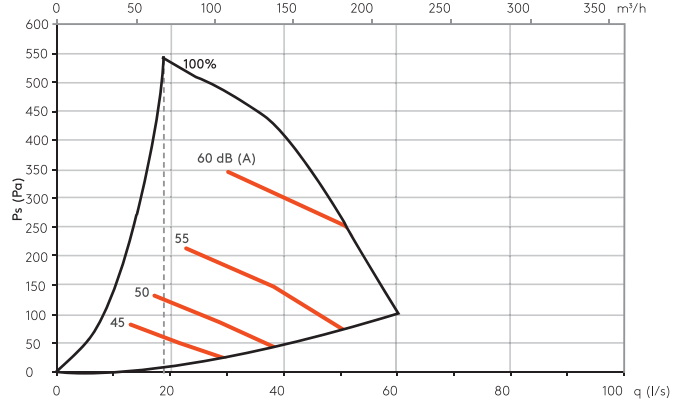

Sound power level emitted to the exhaust air duct

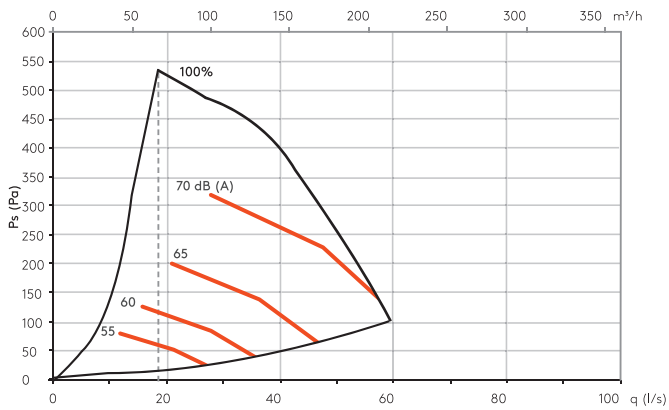


Sound power level to a duct for outdoor air

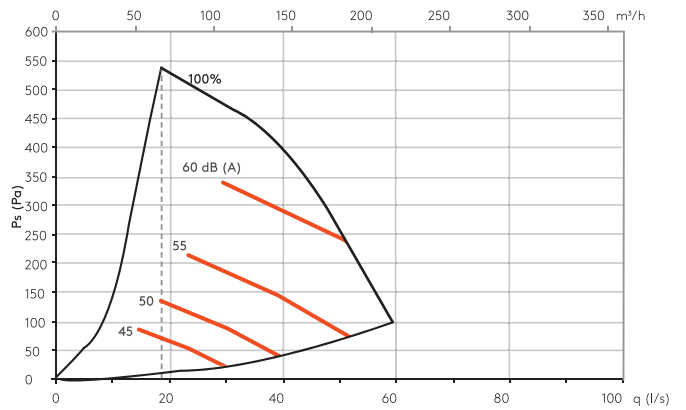

- Reference air flow
- Max. air flow
- Min air flow
- Sound power L_{wo} dB (A)

Air flow and sound power level to the surroundings

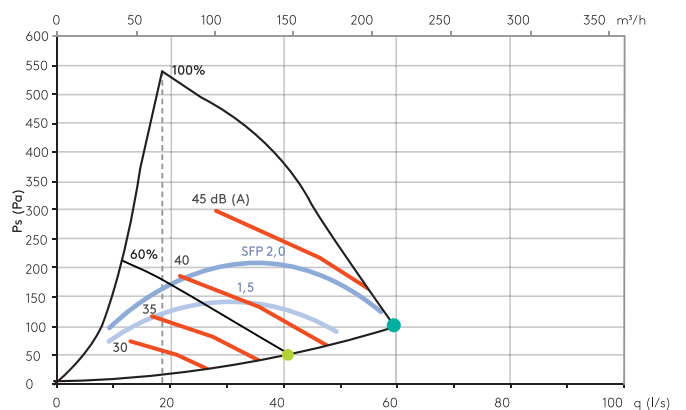

	Sound power level, L_w (dB), table K_{ck}							
	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
Sound emitted to supply air duct	15	6	1	-4	-5	-11	-20	-30
Sound emitted to extract air duct	21	13	0	-10	-16	-23	-32	-32
Sound emitted to exhaust air duct	16	9	0	-4	-5	-12	-21	-32
Sound to a duct for outdoor air	22	12	-2	-11	-12	-24	-31	-31
Sound emitted to the surroundings	19	11	4	-8	-17	-19	-23	-25

Correction table for sound pressure level		
room area	normally furnished room	heavily furnished room
5 m ²	- 2 dB(A)	+ 3 dB(A)
10 m ²	- 4 dB(A)	0 dB(A)
15 m ²	- 5 dB(A)	- 3 dB(A)

For more detailed sound data refer to the calculation software ProCasa.